



CC2-CS

Clinic Cancel only Station

The Tech Works **CC2-CS** is a Cancel only Station in a semi-flush ABS plastic enclosure for durable emergency signaling. This station is intended to be used with our other CC-Series products when a Remote Cancel only button is required to reset a dome light or station. Staff is provided with a distinctive "CANCEL" button to reset other station.

An integral call confirmation LED notifies the user that a call for help has been sent. The Call Assurance Light will be Off if no call is pending, glowing steadily if a Normal Call is pending, and flashing if a Call is Pending.

This is a passive button-and-light assembly designed for use with active stations like the **CC2-DL-44** Dome Light or **PBS** Patient Bed Station. Screw Terminals provide wiring connection to the active electronic stations that provide signaling and control for the **CC2-CS**.

Mounting is a standard 1-gang electrical box. An integral back plate provides mounting and adaptor alignment for the **CC2-CS**.

BENEFITS

- Reliable Signaling
- No Maintenance
- Low Power
- Simple Wiring
- Easily Integrates to other Systems

Associated Equipment

CC2-DL-44	Dome Light
PBS	Patient Bed Station

Design Information

Power	11-25V DC
Color	White
Mounting	1 Gang Back Box
Dimensions	3.25" W x 0.5" D x 5" H
Weight	0.25 lbs.

Architects' and Engineers' Specifications

The Clinic System Cancel only Station shall be a standard one gang electrical box mounting device constructed of ABS plastic. A distinctive Cancel button shall be provided to reset the station. A call confirmation light shall be included to indicate that a call has been placed. The Cancel station shall be a passive electronic device requiring no more than 5 mA at 24 Volts DC for full operation.

The Clinic System Cancel only Station shall be Tech Works Model CC2-CS.




Tech Works®

"Making Specialized Communication Easy"

Quick Start Installation Instructions

CC2-DL-44-B
DOME LIGHT
4 COLOR

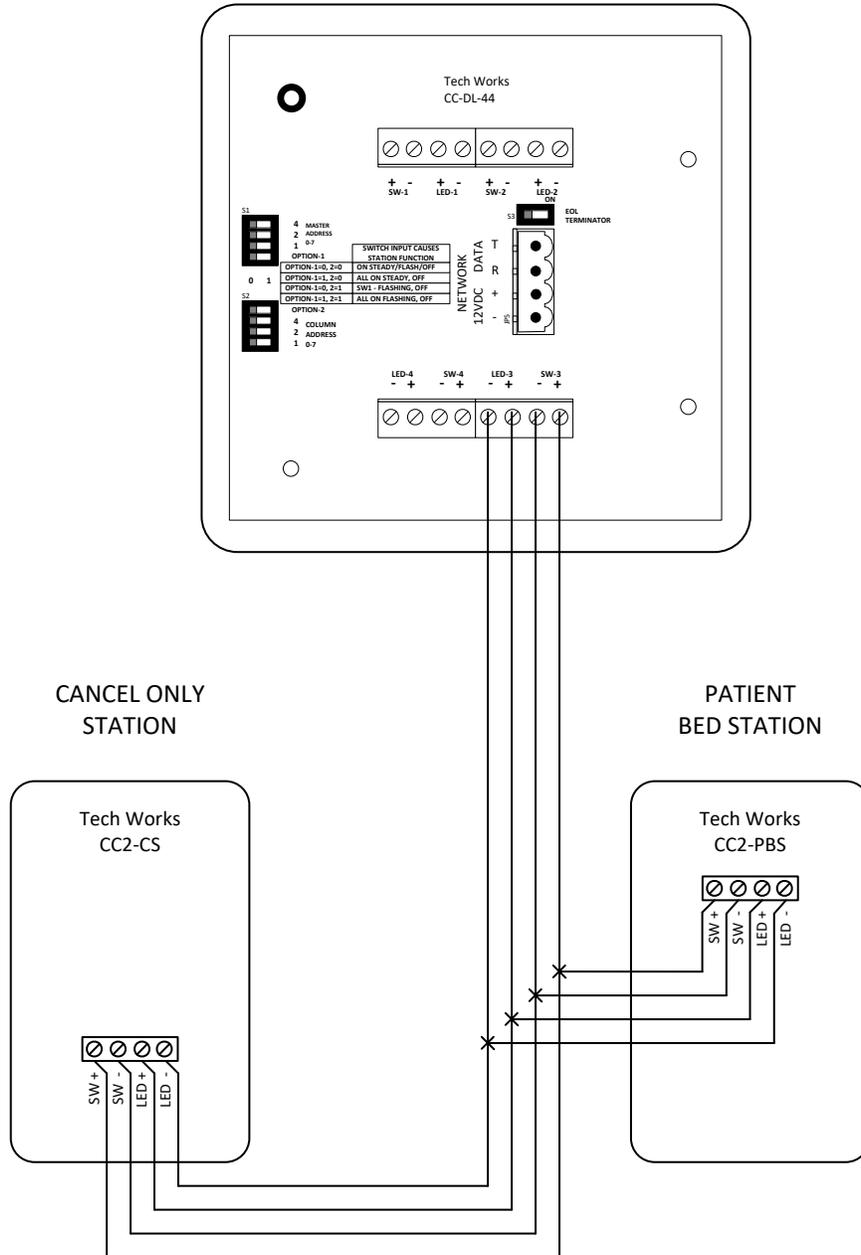

Connect to any station input to control that color.

