




PS-2437A

POWER SUPPLY

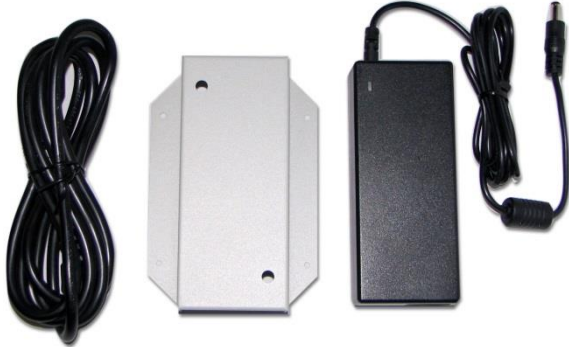

BENEFITS

- Fully Regulated
- Small Package
- Easy to Install
- UL and CSA Listed
- Complete with Cable

The Tech Works **PS-2437A** is a regulated computer grade power supply capable of providing 3.75 Amps of power at 24-Volts DC to any of our products. Ground is isolated from the power supply 24 VDC common connection to provide galvanic isolation in critical applications. This unit is UL and CSA listed in a surface mount enclosure. A 6-foot removable power cord with a North American standard Edison connector is included. This is a switching power supply designed to operate on worldwide AC input.

A metal mounting bracket is included to allow the unit to be screwed to the wall or under a counter.

Associated Equipment

IC-52	2-Channel Intercom Amplifier
ICA-202	2-Channel Intercom Amplifier
PA-402	Paging Amplifier
CI-HSI-41	Headset Intercom System
CI-MSI-22	Microphone Speaker Interface
CI-ODC-1	Operator Desk Console

Design Information

Power Input	100-240V AC 50-60Hz
Power Output	24V DC
Color	Black
Mounting	Wall / Backboard w/Included Mount
Dimensions	2.6" W x 5.6" H x 1.5" D
Weight	1 lb.

Architects' and Engineers' Specifications

The Audio System shall be supplied with a 24-Volt Direct Current power supply capable of powering all devices, as shown on plans, simultaneously with a minimum of 25% reserve power. The power supply shall have isolated ground from DC power common and be UL/CSA Listed for use with alarm and signaling systems. A surface mounting metal bracket shall be included to house the power supply. This unit shall operate from an input of 100 to 240 Volts AC and supply a minimum of 3.75 Amps at 24-Volts DC.

The Power Supply shall be
Tech Works Model PS-2437A.





Tech Works®

"Making Specialized Communication Easy"



NETWORK POWER & WIRE REQUIREMENTS

POWER SHOULD BE THE SHORTEST ROUTE POSSIBLE!

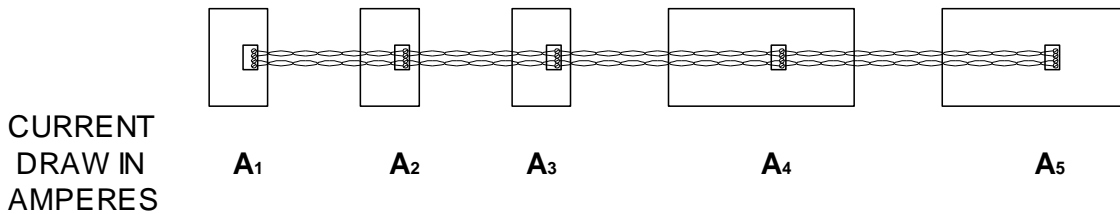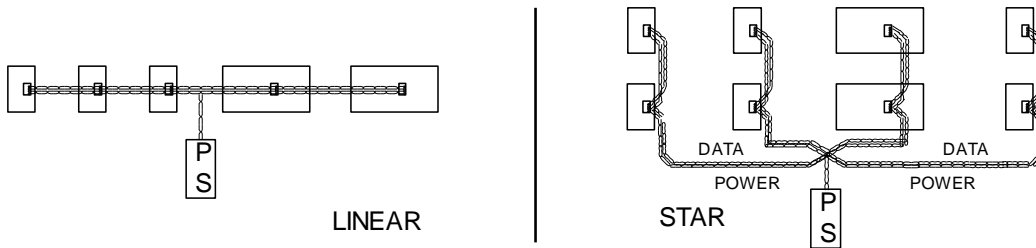

POWER SUPPLY SIZE REQUIRED

$$A_1 + A_2 + A_3 + A_4 + A_5 = A_{TOTAL}$$

ADD THE MAXIMUM CURRENT REQUIRED BY EACH DEVICE TO DETERMINE THE TOTAL CURRENT REQUIRED FROM THE POWER SUPPLY.

WIRE SIZE REQUIRED

$$\frac{V}{A_1 + A_2 + A_3 + A_4 + A_5} > R_{WIRE} \times 2$$

VOLTAGE / CURRENT SHOULD ALWAYS BE GREATER THAN THE RESISTANCE OF THE WIRE X 2

