



Application Guide Rest Room Emergency Call



Benefits

- UL-1069/ADA compliant
- Scalable from 1 to 256 locations
- Integrate for messaging and reporting
- Increase staff efficiency
- Simple to install, use, and support
- Customizable notifications
- 36-month limited lifetime warranty
- Engineered and Built in the USA

Many Public Rest Rooms require an Emergency Pull Station today. Tech Works NC-Series is UL1069 listed for all Nurse Call and emergency signaling. Systems as small as one station with one Dome Light are very easy with Tech Works NC.

The Dome Light can be the controller so that all you need is a Dome Light, a Power Supply, and a Pull Station. If secondary alarm notification is required at a staff location, just add a secondary "Slave" Dome Light. All of our single-color dome lights are available with or without built in audio tone to draw attention to the emergency.

For larger applications with multiple stalls or toilets, each Dome Light can support up to 8 NC-EPS Emergency Pull Stations. This allows a single Dome Light outside of a rest room to support up to 8 Pull Stations in 8 stalls in a single location.

When there are multiple rest rooms to be covered, a control module and multiple annunciator locations can be added as needed. This allows staff to respond quickly to emergency calls from multiple areas.



Features

Modular

Enables a facility to design a system custom-tailored to their specific needs

Fully Integrated

Uses Tech Works unified technology and operates over any standard medium

Flexible

ADA Compliant


Designed to handle all of a clinic's operational communication needs

Call switches feature visual call acknowledgement

System Design Layout and Connections

From one

To many.....

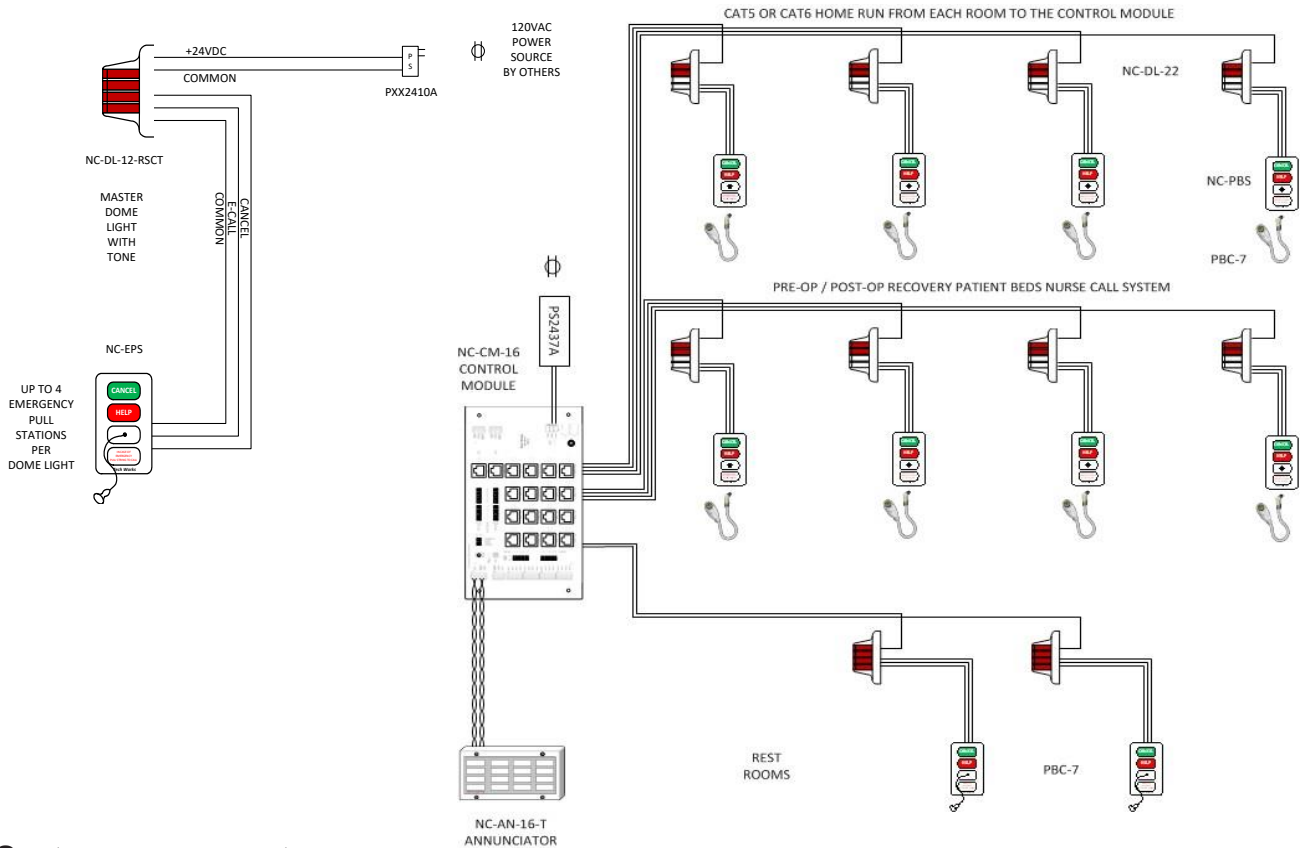

System components

Part No.

NC-PBS-1	Patient Bed Station, Single Bed
PBC-7	Call Cord - 7 feet long
NC-DL-22-RW	Dome Light-2 Color, Red/White, 2 Input
NC-EPS	Visual only Emergency Pull String Station with Acknowledge Light
NC-DL-12-RSCT	Dome Light-1 Color, Red, 2 Input, with Tone sounder unit
NC-CM-16	Control Module - 16 Point, Addressable Input Interface
NC-AN-16-T	Annunciator Panel - 16 Point, Tone/Visual
PS-2437A	Power Supply 3.7 Amps @ 24 VDC

Data sheets available at: <https://techworks-usa.com/dealer-ae/data-sheets/>

