



Many Public Rest Rooms require an Emergency Pull Station today. Tech Works NC-Series is UL1069 listed for all Nurse Call and emergency signaling. Systems as small as one station with one Dome Light are very easy with Tech Works NC.

The Dome Light can be the controller so that all you need is a Dome Light, a Power Supply, and a Pull Station. If secondary alarm notification is required at a staff location, just add a secondary Dome Light. All of our single-color dome lights are available with or without built in audio tone to draw attention to the emergency.

For larger applications with multiple stalls or toilets, each Dome Light can support up to 8 NC-EPS Emergency Pull Stations. This allows a single Dome Light outside of a rest room to support up to 8 Pull Stations in 8 stalls in a single location. When there are multiple rest rooms to be covered, a control module and multiple annunciator locations can be added as needed. This allows staff to respond quickly to emergency calls from multiple areas.

Application Guide Rest Room Emergency Call

Benefits

- UL-1069/ADA compliant
- Scalable from 1 to 256 locations
- Integrate for messaging and reporting
- Increase staff efficiency
- Simple to install, use, and support
- Customizable notifications
- 36-month limited warranty
- Engineered and Built in the USA



Features

Modular Enables a facility to design a system custom-tailored to their specific needs

Fully Integrated Uses Tech Works unified technology and operates over any standard medium

Flexible Designed to handle all of a clinic's operational communication needs

ADA Compliant Call switches feature visual call acknowledgement




Tech Works®

System Design Layout and Connections

From one

To many.....

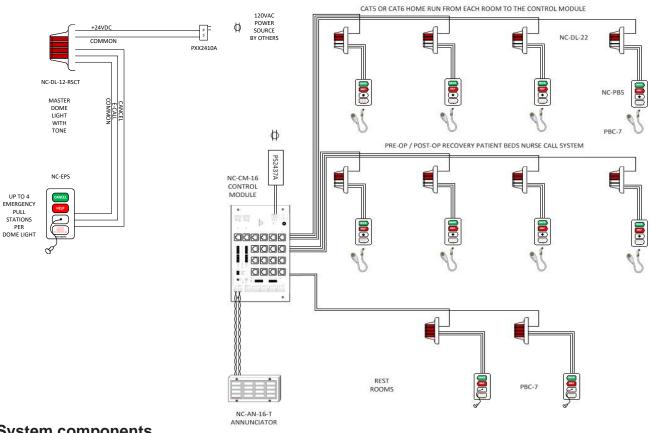

System components

Part No.

NC-PBS-1 Patient Bed Station, Single Bed

PBC-7 Call Cord - 7 feet long

NC-DL-22-RW Dome Light-2 Color, Red/White, 2 Input

NC-EPS Visual only Emergency Pull String Station with Acknowledge Light

NC-DL-12-RSCT Dome Light-1 Color, Red, 2 Input, with Tone sounder unit NC-CM-16 Control Module - 16 Point, Addressable Input Interface

NC-AN-16-T Annunciator Panel - 16 Point, Tone/Visual

Power Supply 3.7 Amps @ 24 VDC PS-2437A

Data sheets available at: https://techworks-usa.com/dealer-ae/data-sheets/

